

S158




order code


housing model	lamp type	lamp holder	order code
S158 MH 70W	tubular / bulb	E27	S158-M0070
S158 MH 150W	tubular / bulb	E27	S158-M0150
S158 HPS 70W	tubular / bulb	E27	S158-S0070
S158 HPS 150W	tubular / bulb	E40	S158-S0150
S158 HPMV 125W	bulb	E27	S158-H0125

note : HPMV 250W is available upon request • specification is subject to change without prior notice

dimension

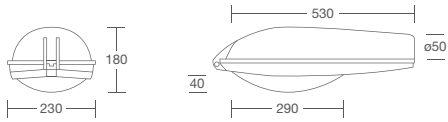


photometric curve

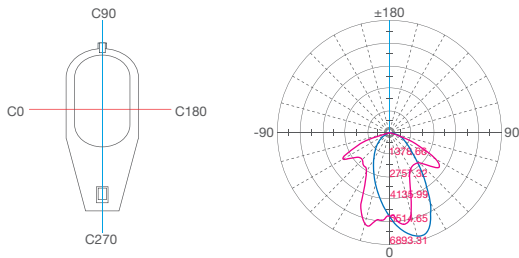

key for standard order coding

S158 M 0070

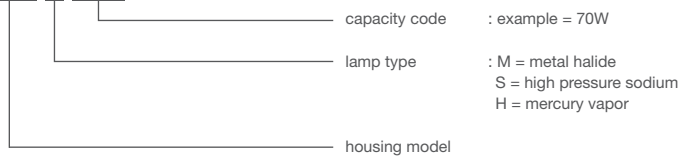

features

electrical system

- built-in control gear suitable for HID lamp from 70W - 250W

housing

- aluminium die-cast housing with epoxy powder coating

glass bowl

- thermal resistant glass bowl

reflector

- anodized aluminium reflector

spigot

- suitable for side entry mounting

IP rating

- IP54 lamp compartment
- IP43 control gear compartment

technical data

ingress protection • IP54 (lamp compartment) & IP43 (gear compartment)
 voltage • 220 - 240 Vac 50 Hz
 lamp wattage • 70W - 250W
 holder type • E27 & E40 ceramic lamp holder
 maximum weight • 7.15kg (HPS 150W)
 designed standards • IEC 60598-2-3
 spigot size • \varnothing 50 mm

