


## S159

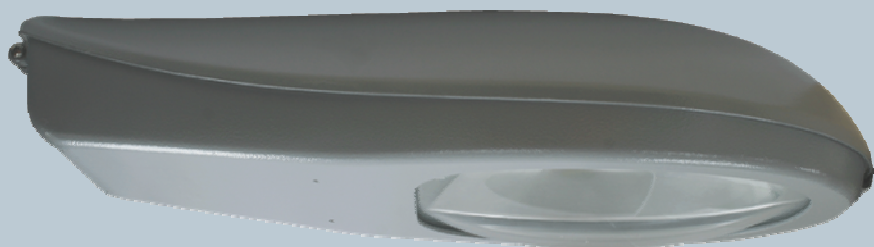

### order Code:

| Casing Model   | Lamp Type      | Lamp Holder | Order Code   |
|----------------|----------------|-------------|--------------|
| S159 MH 70W    | Tubular / Bulb | E27         | S159 – M0070 |
| S159 MH 150W   | Tubular / Bulb | E27         | S159 – M0150 |
| S159 HPS 70W   | Tubular / Bulb | E27         | S159 – S0070 |
| S159 HPS 150W  | Tubular        | E40         | S159 – S0150 |
| S159 HPMV 125W | Bulb           | E27         | S159 – H0125 |

Note: Specification is subject to change without prior notice.

**technical data:**

**Voltage:**

- 220 ~ 240 Vac 50Hz

**Lamp Wattage**

- 70 ~ 150W

**Holder Type**

- E27 & E40 ceramic lamp holder

**Designed Standards**


- IEC 60598-2-3

**Spigot Size**

- Ø50mm

**Ingress Protection**

- IP66 Lamp Compartment
- IP54 Gear Compartment



**features:**

**Electrical system**

- Built – in control gear suitable for HID lamp from 70W – 150W.

**Housing**

- Aluminium die – cast housing with epoxy powder coating.

**Glass bowl**

- Thermal resistant glass bowl.


**Reflector**

- Anodized aluminium reflector.


**Spigot**

- Suitable for side entry mounting.

**dimension:**

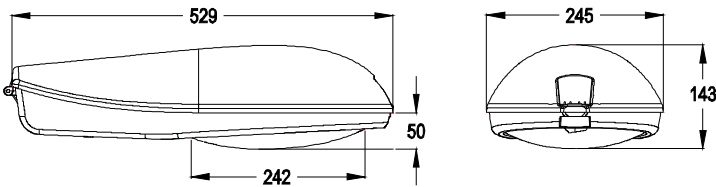

**photometric curve:**

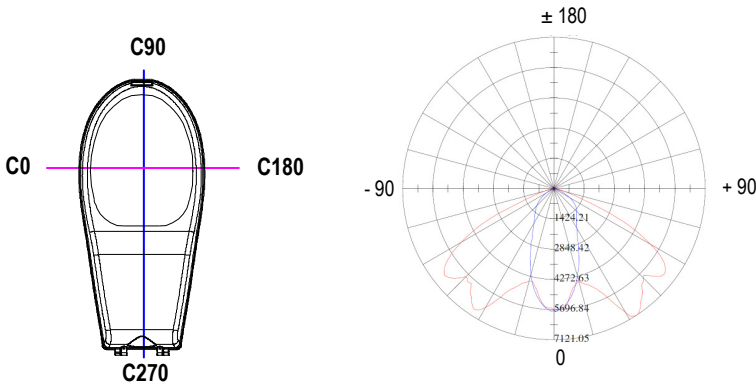

NOTE: Photometric Result tested based on 14500lm HPS 150W Clear Tube

**key for standard order coding:**

**S159 – M 0070**

