

S1528 & S2028

S1528 – Asy



S2028 - Asy



Order Code:

Model	Lamp Type	Lamp Holder	Order Code
S1528 Asy MH 70W	Tubular / Double Ended	E27 / RX7s	S1528 Asy – M0070
S1528 Asy MH 150W	Tubular / Double Ended	E27 / RX7s	S1528 Asy – M0150
S1528 Asy HPS 70W	Tubular / Double Ended	E27 / RX7s	S1528 Asy – S0070
S1528 Asy HPS 150W	Double Ended	RX7s	S1528 Asy – S0150
Model	Lamp Type	Lamp Holder	Order Code
S2028 Asy MH 250W	Tubular	E40	S2028 Asy – M0250
S2028 Asy MH 400W	Tubular	E40	S2028 Asy – M0400
S2028 Asy HPS 250W	Tubular	E40	S2028 Asy – S0250
S2028 Asy HPS 400W	Tubular	E40	S2028 Asy – S0400

Note: Specification is subject to change without prior notice. • Asy = Asymmetrical Reflector

220 ~ 240V 50 / 60Hz RX7s / E27 / E40    IP65 

Technical data:

Ingress Protection

- IP65

Voltage

- 220~240V 50 / 60Hz

Lamp Wattage

- 70~150W
- 250 ~ 400W

Holder Type

- E27 / RX7s / E40

Maximum Weight

- 3.9 kg (S1528)
- 7.6 kg (S2028)

Features:

Housing

- High pressure aluminium die – cast body coated with epoxy powder.

Reflector

- High purity anodized hammered aluminium reflector.

Glass

- Thermal resistant tempered glass.

Mounting Bracket


- Steel mounting bracket coated with epoxy powder

Color of housing


- Light Grey (Akzo Nobel GI401Z)

Dimension:


S1528 - Asy

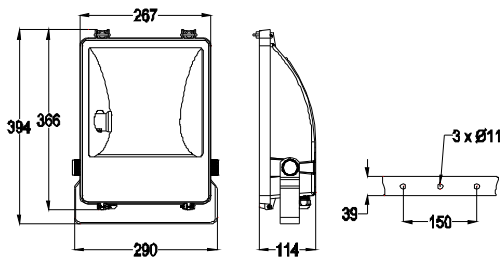


S2028 - Asy

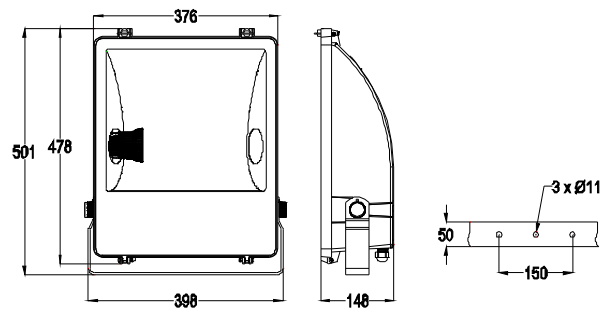

Photometric curve:

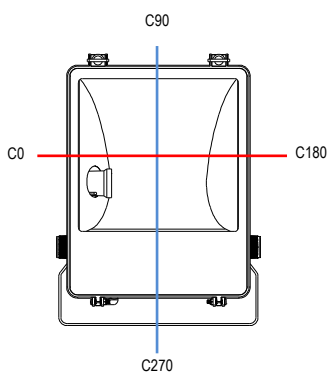


S1528 - Asy

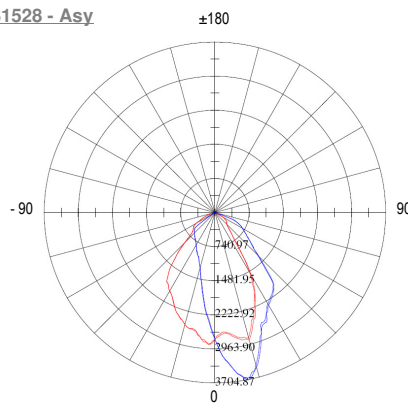

NOTE: Photometric Result tested based on 6300lm MH 70W Clear Tube.

S2028 - Asy

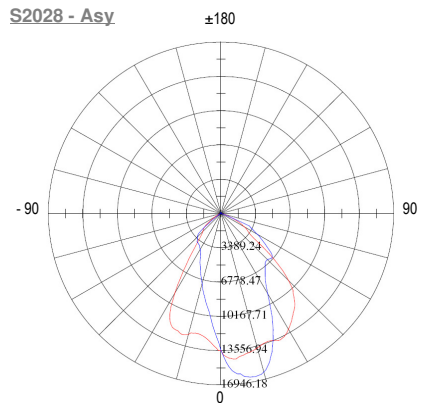

NOTE: Photometric Result tested based on 32000lm MH 400W Clear Tube.

Key for standard order coding:

S1528 Asy – M 0150



NIKKON®

Light up the World